

Key Features

- Full-duplex line rate AES encryption at layer 2 for 10Mbps, FastEthernet (100Mbps), and Gigabit Ethernet (GbE) networks
- Standards-based authentication, digital certificates, and key management
- Bump-in-the-wire design for easy installation into existing network environments
- Designed to international Common Criteria and U.S. Government FIPS security standards
- Part of world's first complete family of High-Speed Encryption devices for network security interface independence
- Central remote configuration, monitoring, and management through SafeEnterprise Security Management Center (SMC)

SafeEnterprise Ethernet Encryptor

For 10Mbps, Fast Ethernet, and Gigabit Ethernet



The cost of network communications bandwidth has decreased significantly in recent years. Enterprises are now able to link corporate and regional offices, server farms, data centers, and disaster recovery centers across floors or across continents with multi-megabit or even gigabit lines at a fraction of the cost they were paying before.

With more and more enterprises relying on high-speed communications to connect critical network infrastructures in support of business continuity, a single disruption or malicious attack against these services can cause businesses to lose millions of dollars while incurring significant legal liability.

As long as critical data must traverse multiple carriers and multiple network nodes before arriving at its final destination, CIOs must ensure that sensitive information is protected from compromise by using the strongest encryption schemes available, without compromising network performance.


What's more, even if data is traversing a truly private network it is still susceptible to theft because fiber lines can be tapped, without even breaking

the sheathing, with inexpensive equipment.


Metro Ethernet has emerged as the new transport technology designed to provide greater bandwidth efficiency, and ease of installation and use for end users and network operators. The line of SafeNet SafeEnterprise™ Ethernet Encryptors are high-performance Layer 2 security appliances. They protect 10Mbps, 100Mbps and GbE networks. With seamless end-to-end integration, SafeEnterprise Ethernet Encryptors deliver instant protection across the network.

Like all SafeNet high-speed security appliances, the SafeEnterprise Ethernet Encryptor is managed by the SafeEnterprise Security Management Center (SMC), a robust, Java™-based policy management software application with secure, flexible, and transparent SNMP-based control and monitoring capabilities. The SMC provides the ability to define integrated security policies that can be centrally and remotely distributed across multiple devices, reducing management complexity and cost.

PRIVATE NETWORK

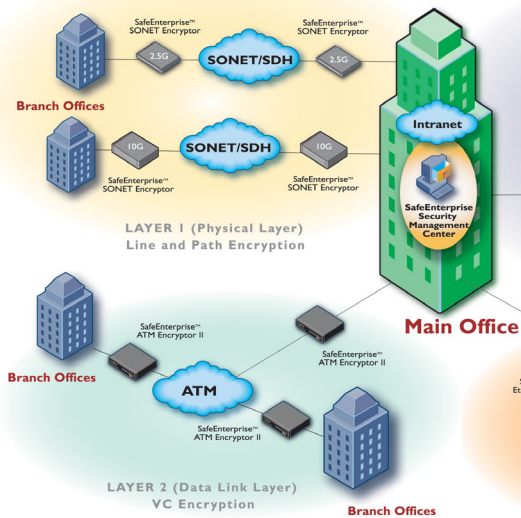

PUBLIC NETWORK

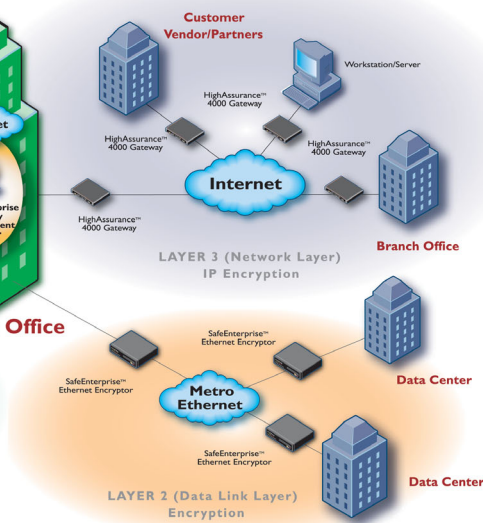

Technical Specifications

SMC Management

- SNMP v3
- Ethernet 10/100, RJ-45
- RS-232 local console
- In-band management

LCD Status Indicator

- Local interface
- Network interface
- Temperature
- Battery level
- System operation
- Secure status
- Power
- LEDs for interface Tx/Rx

Physical Security

- Tamper-proof storage of encryption keys and user passwords
- Tamper-resistant metal case

Environmental

- 5° to 40°C operating temperature
- 0 to 80% RH @ 40°C operating temperature
- 0 to 1980m operating altitude AMSL

Electrical

- 90VAC to 250VAC, 110W maximum, 47-63Hz
- -48VDC, 40W maximum

Mechanical

- Height - 41mm (1RU)
- Width - 435mm (19" rack mountable)
- Depth - 285mm
- Weight - 4.5kg

Performance

- Full-duplex operation at line speed with no packet loss for all modes of operation
- Cut-through data streaming for low latency vs. store and forward architectures
- Key change without interruption

Network

- Ethernet II, IEEE 802.3
- Jumbo frame support
- VLAN, MPLS transparency

Interfaces

- SFP fiber modules (Multi-mode: 850nm, Single-mode: 1310nm)
- SFP electrical modules

Cryptography

- AES algorithm - 256-bit key
- CFB providing automatic crypto resynchronization

Audit

- Alarms
- Interface status
- Event Log
- Audit Log
- Date and time of secure connection
- Configuration changes

Key Management

- RSA public key
- Automatic session key update
- Authentication using X.509 certificates

Accreditations

- Common Criteria EAL 4 in process
- FIPS PUB 140-2, Level 3 in process

Corporate: 4690 Millennium Drive, Belcamp, Maryland 21017 USA
Tel: +1 410.931.7500 or 800.533.3958 email: info@safenet-inc.com

www.safenet-inc.com

©2006 SafeNet, Inc. All rights reserved. SafeNet and SafeNet logo are registered trademarks of SafeNet. All other product names are trademarks of their respective owners.

